




1. SCOPE

1.1 Scope. This drawing describes the requirements for a 16 pin, leadless chip carrier, resistor network. These networks are available in hermetically sealed and nonhermetically sealed packages.

1.2 Part or Identifying Number (PIN). The complete PIN is as follows:

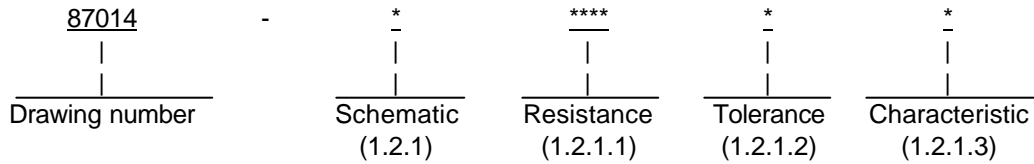

1.2.1 Schematic. The schematic of the resistor network is identified by a single letter in accordance with figure 1.

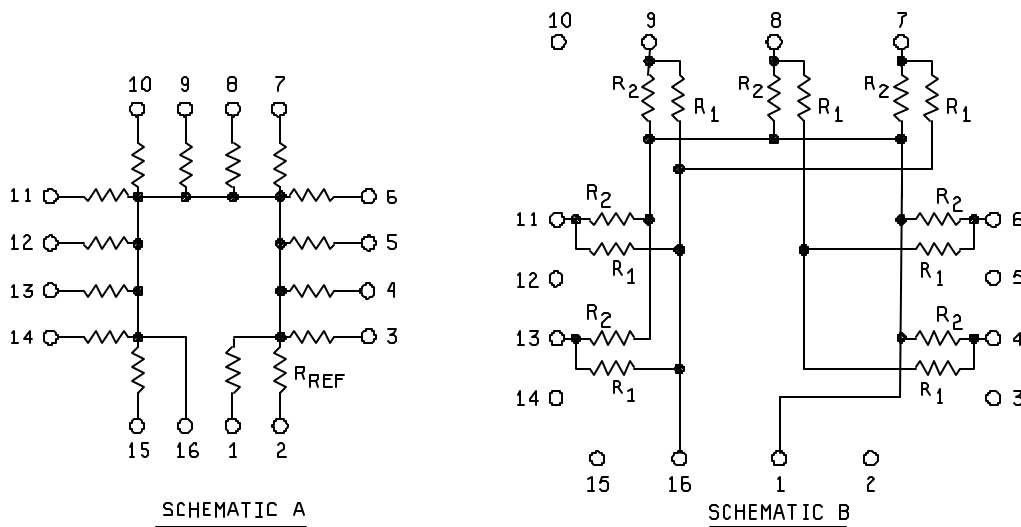


FIGURE 1. Schematics.

1.2.1.1 Resistance value designation. The resistance value designations is in accordance with MIL-PRF-914. Resistance value designations for the "B" schematic is specified in table I.

TABLE I. Resistance value designation.

Resistance designator	R <sub>1</sub> (ohms)	R <sub>2</sub> (ohms)	Resistance designator	R <sub>1</sub> (ohms)	R <sub>2</sub> (ohms)
A001	82	130	A008	220	330
A002	120	200	A009	330	390
A003	130	210	A010	330	470
A004	160	260	A011	330	680
A005	180	240	A012	1,500	3,300
A006	180	390	A013	3,000	6,200
A007	220	270			

<b>DEFENSE ELECTRONIC SUPPLY CENTER</b>	SIZE	CODE IDENT NO.	DWG NO.
<b>DAYTON, OHIO</b>	<b>A</b>	<b>14933</b>	<b>87014</b>
		REV H	PAGE 2

1.2.1.2 Resistance tolerance. The resistance tolerance is identified as a single letter in accordance with table II.

TABLE II. Resistance tolerance.

Symbol	Resistance tolerance (in percent) ±
B	0.1
D	0.5
F	1.0
G	2.0
J	5.0

1.2.1.3 Characteristic. Resistor networks are available in characteristics C, H, K, M, R, or V in accordance with MIL-PRF-914 (see 3.2). Matched ratio specified in MIL-PRF-914 for characteristics C and V are not applicable to schematic B.

## 2. APPLICABLE DOCUMENTS

### 2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

#### DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-914 - Resistor Networks, Fixed, Film, Surface Mount, Nonestablished Reliability, and Established Reliability, General Specification For.

#### DEPARTMENT OF DEFENSE STANDARD

MIL-STD-790 - Established Reliability and High Reliability Qualified Products List (QPL) Systems for Electrical, Electronic, and Fiber Optic Parts Specifications.  
MIL-STD-1285 - Marking of Electrical and Electronic Parts.

(Copies of these documents are available online at <http://assist.daps.dla.mil/quicksearch/> or [www.dodssp.daps.mil](http://www.dodssp.daps.mil) or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)


2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

<b>DEFENSE ELECTRONIC SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 87014</b>
		<b>REV H</b>	<b>PAGE 3</b>

### 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-914 and as specified herein.

3.2 Interface and physical dimensions. The resistor shall meet the interface and physical dimensions as specified in MIL-PRF-914 and herein (see figure 2). Cavity constructions using wire bonding techniques shall be supplied only as a characteristic C hermetically sealed resistor network.

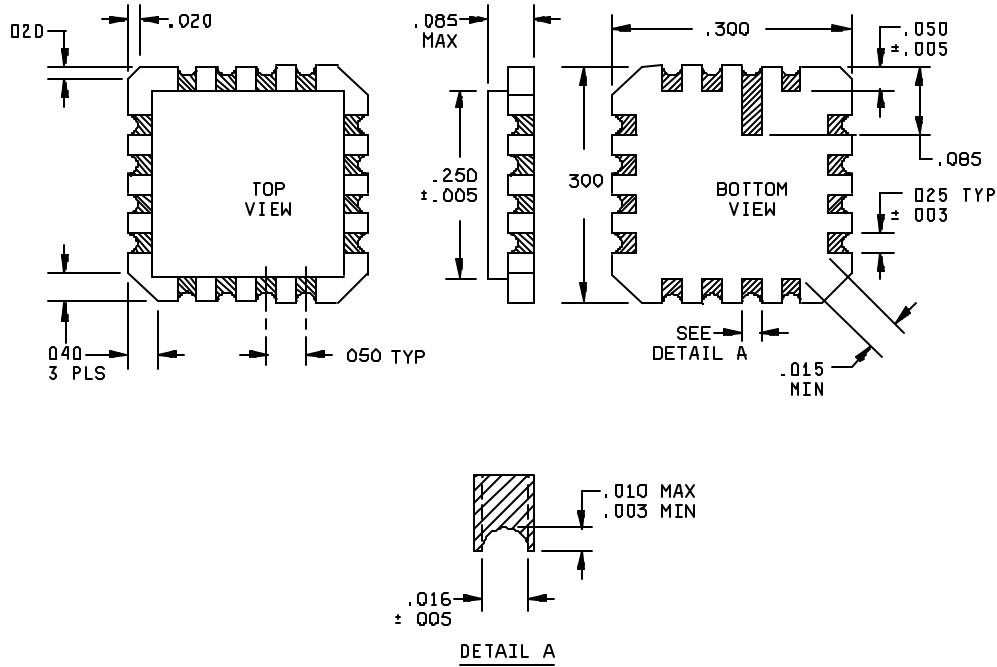

<u>Inches</u>	<u>mm</u>	<u>Inches</u>	<u>mm</u>	<u>Inches</u>	<u>mm</u>
0.003	0.08	0.016	0.41	0.050	1.27
0.005	0.13	0.020	0.51	0.085	2.16
0.010	0.25	0.025	0.64	0.250	6.35
0.015	0.38	0.040	1.02	0.300	7.62

**NOTES:**

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are  $\pm 0.008$  (0.20 mm).
4. Adjacent corner pads may be rounded or diagonally cut to meet the .015 (0.38 mm) minimum requirement.

FIGURE 2. Leadless chip carrier.

<b>DEFENSE ELECTRONIC SUPPLY CENTER DAYTON, OHIO</b>	SIZE	CODE IDENT NO.	DWG NO.
	<b>A</b>	<b>14933</b>	<b>87014</b>
		REV H	PAGE 4

3.2.1 Termination. Termination finish shall be tin-lead or hot solder dip as specified in MIL-PRF-914.

3.3 Electrical characteristics.

3.3.1 Resistance range. The resistance range shall be 10 ohms to 100 kilohms.

3.3.2 Resistor power rating. The resistor power rating for individual resistors shall be in accordance with table II.

3.3.3 Package power rating. The package power rating shall be in accordance with table III. For temperatures in excess of 70°C, derated in accordance with MIL-PRF-914.

TABLE III. Power ratings.

Schematic	Characteristic K and M		Characteristics C, H, R, and V	
	Element (watts)	Network (watts)	Element (watts)	Network (watts)
A	0.05	0.75	0.025	0.375
B	0.05	0.70	0.025	0.35

3.3.4 Power conditioning. Power conditioning shall be in accordance with MIL-PRF-914 at 1.5 times the rated power specified for individual resistors (see 3.3.2).

3.3.5 Operating voltage. The maximum operating voltage shall be 50 Vdc.

3.3.6 Operating temperature. The operating temperature shall be -55°C to +125°C.

3.3.7 Resistance temperature characteristic. The resistance temperature characteristic shall be in accordance with MIL-PRF-914.

3.3.8 TC tracking. The TC tracking shall be ±10 ppm/°C.

3.3.9 Solderability. When resistors are tested as specified in 4.6, there shall be no evidence of electrical or mechanical damage.

3.3.9.1 Failure criteria for leadless packages. The criteria for acceptable solderability during evaluation of the terminations are:

- a. The total surface area of the dipped part of the termination is at least 95 percent covered by a continuous new solder coating.
- b. That pinholes, voids, porosity, nonwetting, or dewetting are not concentrated in one area and do not exceed 5 percent of the total metallized termination area.

<b>DEFENSE ELECTRONIC SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 87014</b>
		<b>REV H</b>	<b>PAGE 5</b>

c. That there shall be no solder bridging between any termination area and any other termination area not connected to it by design. In the event that the solder dipping causes bridging, the test shall not be considered a failure provided that a local application of heat (i.e., gas, soldering iron, or redipping) results in solder pullback and no wetting of the dielectric area is indicated by microscope examination at a magnification of between 10x and 20x.

That area of the surface to be tested as specified in 4.6c shall include the total metallized area of both the castellations and the terminal pads. In case of a dispute, the percentage of coverage with pinholes or voids shall be determined by actual measurement of these areas, as compared to the total area.

3.4 Environmental characteristic. The environmental characteristics shall be in accordance with MIL-PRF-914 characteristic C, H, K, M, R or V.

3.5 Marking. Marking shall be in accordance with MIL-STD-1285, except the PIN shall be as specified in 1.2, with the manufacturer's CAGE number or trade mark and date code.

3.6 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.7 Certificate of compliance. A certificate of compliance shall be required from manufacturers requesting to be listed as a suggested source of supply.

3.8 Workmanship. Resistors shall be uniform in quality and free from any defects that will affect life, serviceability, or appearance.

#### 4. VERIFICATION

4.1 Product assurance program. The product assurance program specified in MIL-PRF-914 and maintained in accordance with MIL-STD-790 is not applicable to this document.

4.2 Qualification inspection. Qualification inspection is not applicable to this document.

4.2.1 Failure rate qualification. The failure rate qualification specified in MIL-PRF-914 is not applicable to this document.

4.3 Conformance inspections.

4.3.1 Inspection of product for delivery. Inspection of product for delivery shall consist of group A and group B inspections of MIL-PRF-914.

4.3.2 Certification. The acquiring activity, at its discretion, may accept a certificate of compliance with group B requirements in lieu of performing group B tests (see 6.2d).

4.4 Inspection of packaging. Inspection of packaging shall be in accordance with MIL-PRF-914.

4.5 "B" schematic tests. For the tests on "B" schematic, the dc resistance measurements, resistance temperature characteristics measurement, and short time overload power application shall be made between each terminal and the application common terminal without compensation for the shunt circuits. The pin to pin dc resistance measurements shall be used directly to determine the acceptability to section 3 requirements.

<b>DEFENSE ELECTRONIC SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 87014</b>
		<b>REV H</b>	<b>PAGE 6</b>

4.6 Solderability. Solderability shall be in accordance with method 208 of MIL-STD-202. The following details shall apply:

- a. Application of flux. Flux type shall be in accordance with MIL-PRF-914. Terminations shall be immersed in the flux, which is at room ambient temperature, to the minimum depth necessary to cover the surface to be tested. The terminations shall be completely immersed by individually dipping each edge with the Y1 axis 30 degrees to 45 degrees from vertical. The terminations to be tested shall be immersed in the flux for a period of 5 seconds to 10 seconds.
- b. Solder dip. The dross and burned flux shall be skimmed from the surface of the molten solder. (NOTE: May not require separate operation in wave or flow pot). The molten solder shall be maintained at a uniform temperature of 245°C ±5°C. The surface of the molten solder shall be skimmed again prior to immersing the terminations in the solder. The part shall be attached to a dipping device and the flux covered terminations immersed, one side at a time, in molten solder to the depth, and in the same manner specified in 4.6a. The immersed and emersion rates shall be 1.000 ±0.250 inch per second and dwell time in the solder bath shall be 5.0 seconds ±0.5 second. After the dipping process, the part shall be allowed to cool in air. Residue flux shall be removed from the terminations by rinsing in a suitable solvent. If necessary, a soft cloth or cotton swab moistened with clean 91 percent isopropyl alcohol shall be used to remove all remaining flux.
- c. Examinations of terminations. After each dip coated termination has been thoroughly cleaned of flux, the castellation and pad shall be examined using a magnification between 10x and 20x.

4.7 Visual and mechanical examination. Resistors shall be examined to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements of MIL-PRF-914.

## 5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Resistor networks are used in surface mounting applications where space is a major concern.

6.2 Ordering data. The contract or purchase order should specify the following:

- a. Complete PIN (see 1.2).
- b. Requirements for delivery of one copy of the conformance inspection data or certification of compliance that parts have passed conformance inspection with each shipment of parts by the manufacturer.
- c. Requirements for packaging and packing. (i.e. ESD sensitive packaging).
- d. Whether the manufacturer performs the group B tests or provides certification of compliance with group B requirements.

<b>DEFENSE ELECTRONIC SUPPLY CENTER</b> <b>DAYTON, OHIO</b>	<b>SIZE</b> <b>A</b>	<b>CODE IDENT NO.</b> <b>14933</b>	<b>DWG NO.</b> <b>87014</b>
		REV H	PAGE 7

6.3 Electrostatic charge. Under several combinations of conditions, these resistors can be electrically damaged, by electrostatic charges, and drift from specified value. Users should consider this phenomena when ordering or shipping resistors. Direct shipment to the Government is controlled by MIL-DTL-39032 which specifies a preventive packaging procedure.

6.4 PIN supersession. PIN's in the original 87014 and revision A have been superseded by a new PIN in revision B that includes a characteristic code to differentiate between hermetically and nonhermetically sealed resistor networks. The following table illustrates a generic PIN substitution:

TABLE II. PIN supersession.

87014 and 87014A	87014B Nonhermetic	87014B Hermetic
87014-*****	87014-*****H 87014-*****V	87014-*****C

6.5 User of record. Coordination of this document for future revisions are coordinated only with the suggested source of supply and the users of record of this document. Requests to be added as a recorded user of this drawing may be achieved online at [resistor@dla.mil](mailto:resistor@dla.mil) or in writing to: DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000 or by telephone (614) 692-0552 or DSN 850-0552.

6.6 Suggested source of supply. Suggested source of supply is listed herein. Additional sources will be added as they become available. Assistance in the use of this drawing may be obtained online at [resistor@dla.mil](mailto:resistor@dla.mil) or contact DSCC-VAT, Post Office Box 3990, Columbus, OH 43216-5000 or by telephone (614) 692-0552 or DSN 850-0552.

DSCC drawing PIN 87014-*****	Vendor similar designation or type number <sup>1/</sup>	Vendor CAGE	Vendor's name and address
Characteristics C; resistance values 10 ohms through 100 kilohms; resistance tolerances B, D, F, G, and J. Schematics A and B.	HC-151 HC-152	27851	Satcon Electronics 165 Cedarhill Street Marlborough, MA 01752-3004
Characteristics H and V; resistance values 10 ohms through 100 kilohms; resistance tolerances B, D, F, G, and J. Schematics A and B.	7***	57027	IRC, Inc. 4222 S. Staples Street Corpus Christi, TX 78411-2702
Characteristics C; resistance values 50 ohms through 100 kilohms; resistance tolerances B, D, F, G, and J. Schematics A .	104-120	57489	Vishay Thin Film 2160 Liberty Drive Niagara Falls, NY 14304-3798

<sup>1/</sup> Parts must be purchased to the DSCC PIN to assure that all performance requirements and tests are met.

<b>DEFENSE ELECTRONIC SUPPLY CENTER DAYTON, OHIO</b>	<b>SIZE A</b>	<b>CODE IDENT NO. 14933</b>	<b>DWG NO. 87014</b>
		<b>REV H</b>	<b>PAGE 8</b>