


Precision High-Voltage Thick-Film Resistors

CGX Series

- 1/2W and 1W
- TC of 50 and 100 ppm/°C
- ±1%, ±2%, or ±5% tolerance
- 500K ohm to 1.5 gig ohm range

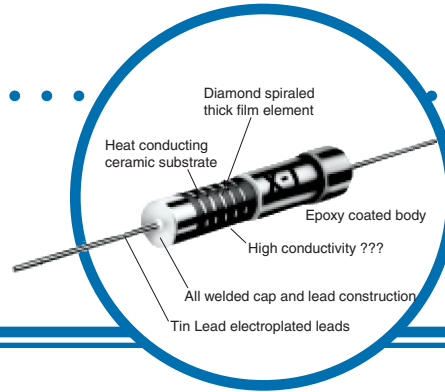


Electrical Data

IRC Type	Power Rating at 70°C (W)	Voltage Rating (Volts)	Resistance Range* (Ohms)	Tolerance (±%)	Maximum ¹ TCR (±ppm/°C)	VCR (ppm/V)	Average Weight (gm)	Maximum Weight (gm)
CGX - 1/2	1/2	3000	500K to 1000M	1, 2, 5	50, 100	0 to -5	0.85	0.98
CGX - 1	1	5000	1M to 1500M	1, 2, 5	50, 100	0 to -5	1.10	1.27

Note:

1. Above 500 meg; only 100ppm/°C available

Physical Data

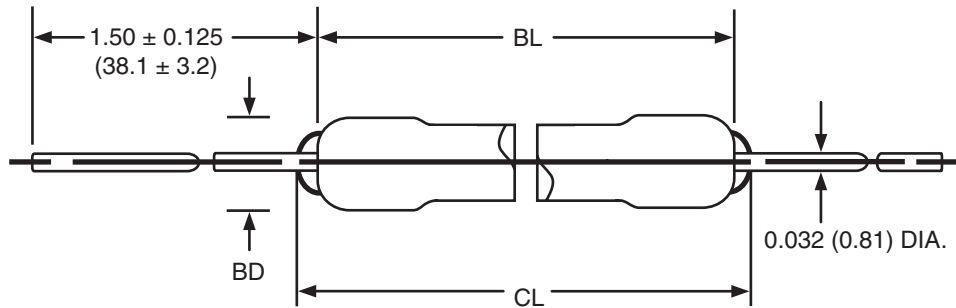

Dimensions (Inches and (mm))

IRC Type	Body Length (BL)	Body Diameter (BD)	Clean Lead to Clean Lead (CL)
CGX - 1/2	0.685 ± 0.031 (17.40 ± 0.79)	0.140 ± 0.016 (3.55 ± 0.41)	0.810 (20.57)
CGX - 1	1.062 ± 0.062 (26.97 ± 1.57)	0.140 ± 0.016 (3.55 ± 0.41)	1.185 (30.10)


General Note

IRC reserves the right to make changes in product specification without notice or liability. All information is subject to IRC's own data and is considered accurate at time of going to print.

Precision High-Voltage Thick-Film Resistors



Power Derating Chart

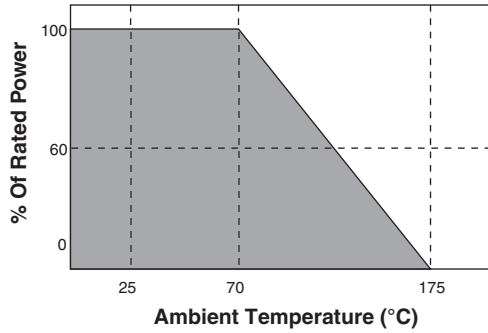

Ordering Data

Sample Part No. **CGX - 1** **01** **1006** **F**

IRC Type

Temperature Coefficient

Resistance

Tolerance

F = 1%
G = 2%
J = 5%